


CROMPACK 5 DIFFUSERS

- Choice of prismatic or opal finish
- Smart design matching with batten
- Easy to attach with anti-lift support
- Long life, UV stabilised material

The Crompack range of diffusers perfectly complement the extensive choice of battens, providing brightness control and improved light distribution. The clear prismatic controller is ideal for general commercial interior applications, efficiently directing more light towards the task area, whilst still gently illuminating the ceiling. If a softly diffuse effect is preferred, then the opal reeded diffuser provides excellent general control of the lamp image.

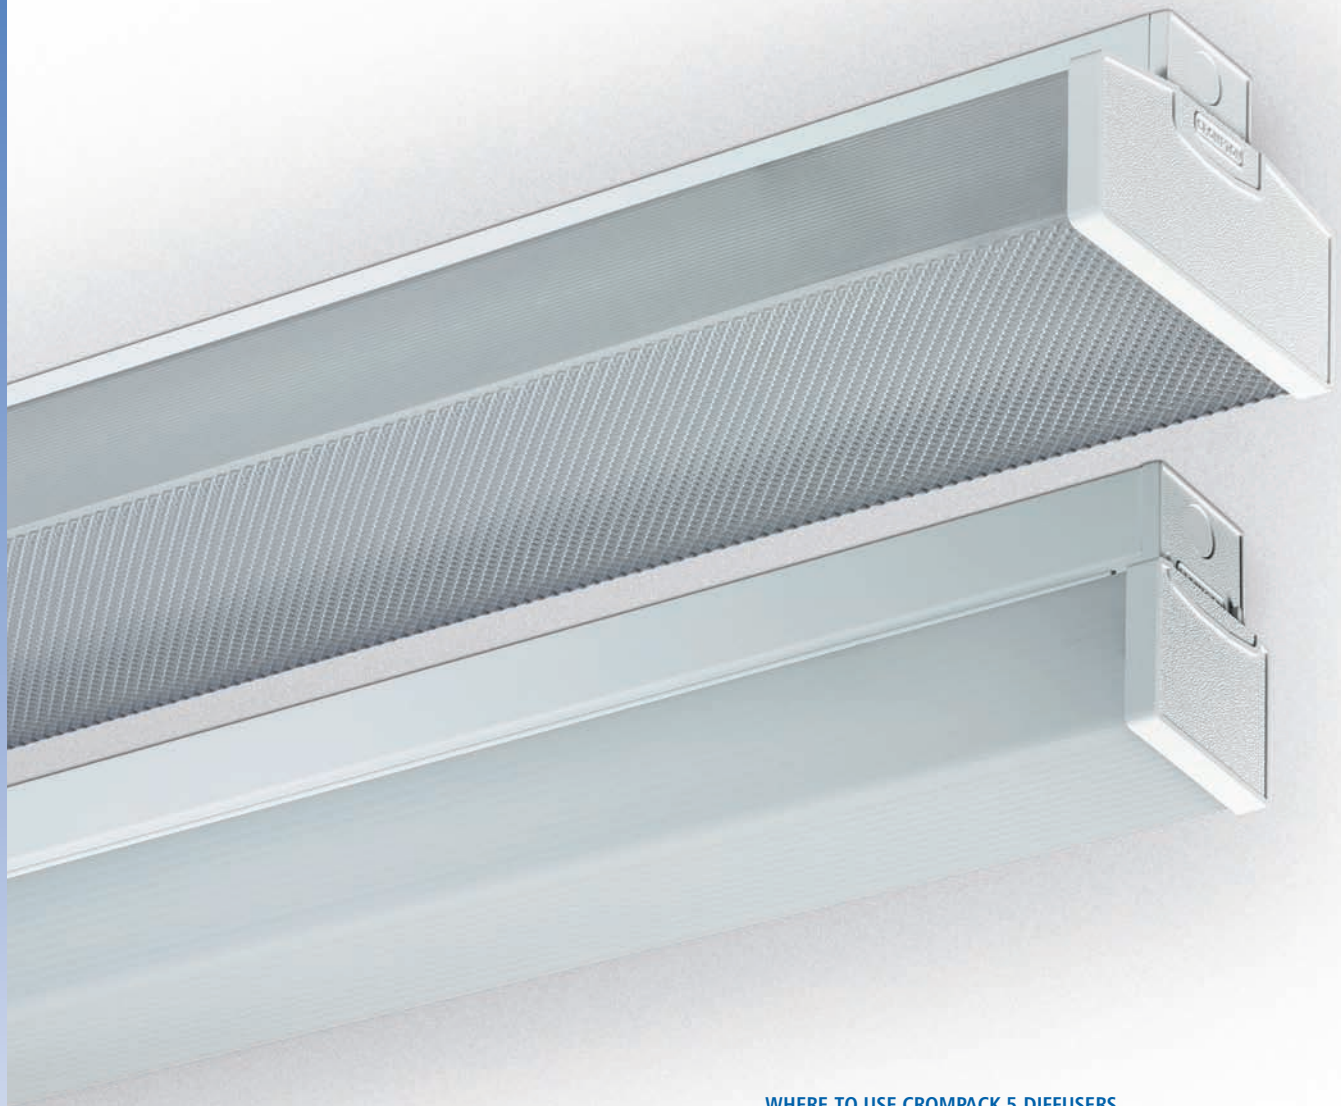

WHERE TO USE CROMPACK 5 DIFFUSERS

- Offices
- Schools
- Corridors
- Store rooms
- Toilets
- Leisure areas
- Retail



**IP20****MATERIALS**


- Prismatic controller - UV stabilised transparent styrene with side and base prisms
- Opal diffuser - UV stabilised opal styrene with reeded side and base
- End cap - injection moulded, colour matched
- Support devices - Single: injection moulded, Twin: Galvanised steel
- Coupling strap - Steel, powder coated in Permawhite finish

INSTALLATION NOTES

- Support device fits onto cover plate via keyhole slot design
- Anti-lift design to prevent rattling or displacement of diffuser
- End caps push fix onto diffuser
- Use coupling strap for continuous mount applications


SPECIFICATION

To specify state: Clear prismatic controller/Opal diffuser, constructed from long life UV stabilised styrene and attached to batten using quick fix support device with anti-lift design feature, as Crompton Crompack 5 CPC/CPD range, part no. _____

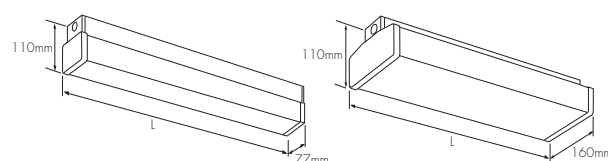DIMENSIONS

Lamp Rating	L (mm)	Lamp Rating	L (mm)
1 x 14/18W	634	2 x 18W	634
1 x 28/36W	1245	2 x 36W	1245
1 x 35/58W	1545	2 x 58W	1545
1 x 70W	1809	2 x 70W	1809
1 x 100W	2420	2 x 100W	2420

Note - all T5 lamp battens use single lamp width diffusers

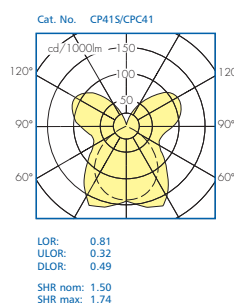PHOTOMETRIC DATA

Reflectances		Room Index									
C	W	F	0.75	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0
70	50	20	39	45	51	54	59	63	65	69	71
30			34	40	45	49	54	58	61	65	68
10			29	35	40	44	50	54	58	62	65
50	50	20	35	40	45	48	52	55	57	60	62
30			31	36	40	43	48	51	54	57	60
10			27	32	37	40	45	48	51	55	57
30	50	20	31	36	39	42	45	48	50	52	54
30			28	32	36	38	42	45	47	50	52
10			25	29	33	36	40	43	45	48	50
0	0	0	20	23	27	29	32	34	36	38	40
BZ-class			5	5	5	5	5	5	5	6	6


See page 422 for Design Guide

CATALOGUE NUMBERS

Lamp Rating		Prismatic	Weight	Opal	Weight
T8/T12	T5	Cat. No.	(kg)	Cat. No.	(kg)
1 x 18W	1/2 x 14/24W	CPC21	0.36	CPD21	0.31
2 x 18W	-	CPC22	0.61	CPD22	0.52
1 x 36W	1/2 x 28/54W	CPC41	0.61	CPD41	0.52
2 x 36W	-	CPC42	1.10	CPD42	0.95
1 x 58W	1/2 x 35/49W	CPC51	0.76	CPD51	0.66
2 x 58W	-	CPC52	1.37	CPD52	1.17
1 x 70W	-	CPC61	0.85	CPD61	0.73
2 x 70W	-	CPC62	1.62	CPD62	1.39
1 x 100W	-	CPC81	1.14	CPD81	0.98
2 x 100W	-	CPC82	2.12	CPD82	1.82

Coupling Straps	Cat No.	Weight (kg)
All single lamp width diffusers	CDC1	0.04
All twin lamp width diffusers	CDC2	0.05

Note: Crompack luminaire to be ordered separately

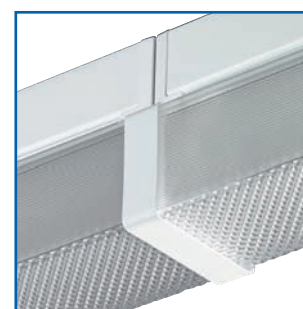

Coupling strap for continuous mount applications

CROMPACK 5 DIFFUSERS