

- Smooth seamless profile
- Tough, vandal resistant polycarbonate
- Opal or clear prismatic diffusers
- Black or white body colour
- Hinged geartray for easy installation
- Round eyelid and mounting skirt attachments

The Vienna range brings a touch of style to interior and exterior applications requiring a tough, water proof, energy efficient light source. Designed to offer a variety of finished appearances, the Vienna blends effortlessly into a multitude of environments with the help of its smooth seamless profile. All versions have vandal resistant polycarbonate body and diffuser in both square and round, and a choice of opal or clear prismatic diffusers with internal prisms, providing a smooth, wipe clean exterior. Mounting skirt and eyelid attachments for the round version, together with photocell kits complete the range, making Vienna a truly versatile lighting solution.



#### WHERE TO USE VIENZA

- Exterior locations
- Hospitals
- Sports and leisure centres
- Car parks
- Toilet and shower areas
- Stairwells
- Emergency exit doors
- Building perimeters
- Universities, schools and colleges

# VIENZA

## LAMP OPTIONS

- 28W, 38W 2D compact fluorescent, 3500°K - GR10q-4 cap



## MATERIALS

- Base - polycarbonate, white or black
- Diffuser - opal or clear polycarbonate with internal prisms
- Geartray - steel, powder coated white
- Eyelid - polycarbonate, white or black
- Round mounting skirt - polycarbonate, white or black

## INSTALLATION NOTES

- Suitable for ceiling or wall mounting
- BESA drill points on rear, and alternative drill points for screw fixing
- Round mounting skirt attachment allows flush fixing over 20mm conduit and BESA box
- Cable entry points from 3 directions, with cover caps to maintain body profile
- Geartray hinges for ease and speed of installation
- 3 way, 2 x 1.5mm<sup>2</sup> terminal block
- Diffuser retained by captive screws, with cover caps to maintain body profile
- Fully retained eyelid attachment
- Supplied complete with lamp


## OPTIONS

- High frequency and switch start control gear as standard
- Fully integral emergency conversion, 3 hour duration
- Suitable for use on defined escape routes
- Round eyelid and mounting skirt attachment
- Photocell kit


## SPECIFICATION

To specify state: Square/Round IP65 vandal resistant compact fluorescent luminaire, black/white polycarbonate base, tough wipe clean opal/prismatic polycarbonate diffuser with internal prisms, eyelid and mounting skirt attachment, and hinged geartray as Crompton Vienna range, part no. \_\_\_\_\_

## PHOTOMETRIC DATA

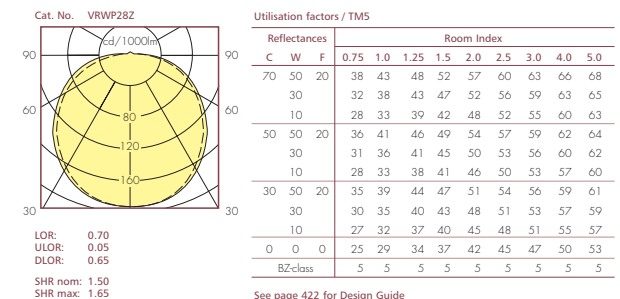

## DIMENSIONS

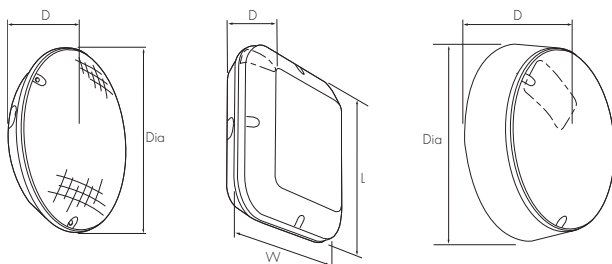

Lamp Rating	L (mm)	W (mm)	Dia (mm)	D (mm)
Round	-	-	319	105
Square	310	310	-	85
Mounting skirt installed	-	-	346	135



Vienna Square



Vienna Round with Eyelid



Vienna Construction

**IP65****CATALOGUE NUMBERS**

Lamp Rating	Gear Option	Body Colour	Diffuser Type	Cat. No.	Weight (kg)	Emergency Cat. No.	Weight (kg)
<b>Vienza Round</b>							
1 x 28w	Switch start	White	Opal	VRWO28S	1.8	-	-
1 x 38w	Switch start	White	Opal	VRWO38S	2.1	-	-
1 x 28w	Switch start	White	Prismatic	VRWP28S	1.8	-	-
1 x 38w	Switch start	White	Prismatic	VRWP38S	2.1	-	-
1 x 28w	High frequency	White	Opal	VRWO28Z	1.4	EBVRWO28Z	1.9
1 x 38w	High frequency	White	Opal	VRWO38Z	1.4	-	-
1 x 28w	High frequency	White	Prismatic	VRWP28Z	1.4	EBVRWP28Z	1.9
1 x 38w	High frequency	White	Prismatic	VRWP38Z	1.4	-	-
1 x 28w	Switch start	Black	Opal	VRBO28S	1.8	-	-
1 x 38w	Switch start	Black	Opal	VRBO38S	2.1	-	-
1 x 28w	Switch start	Black	Prismatic	VRBP28S	1.8	-	-
1 x 38w	Switch start	Black	Prismatic	VRBP38S	2.1	-	-
1 x 28w	High frequency	Black	Opal	VRBO28Z	1.4	EBVRBO28Z	1.9
1 x 38w	High frequency	Black	Opal	VRBO38Z	1.4	-	-
1 x 28w	High frequency	Black	Prismatic	VRBP28Z	1.4	EBVRBP28Z	1.9
1 x 38w	High frequency	Black	Prismatic	VRBP38Z	1.4	-	-
<b>Vienza Square</b>							
1 x 28w	Switch start	White	Opal	VSWO28S	2.0	-	-
1 x 38w	Switch start	White	Opal	VSWO38S	2.3	-	-
1 x 28w	Switch start	White	Prismatic	VSWP28S	2.0	-	-
1 x 38w	Switch start	White	Prismatic	VSWP38S	2.3	-	-
1 x 28w	High frequency	White	Opal	VSWO28Z	1.6	EBVSWO28Z	2.1
1 x 38w	High frequency	White	Opal	VSWO38Z	1.6	-	-
1 x 28w	High frequency	White	Prismatic	VSWP28Z	1.6	EBVSWP28Z	2.1
1 x 38w	High frequency	White	Prismatic	VSWP38Z	1.6	-	-
1 x 28w	Switch start	Black	Opal	VSBO28S	2.0	-	-
1 x 38w	Switch start	Black	Opal	VSBO38S	2.3	-	-
1 x 28w	Switch start	Black	Prismatic	VSBP28S	2.0	-	-
1 x 38w	Switch start	Black	Prismatic	VSBP38S	2.3	-	-
1 x 28w	High frequency	Black	Opal	VSBO28Z	1.6	EBVSBO28Z	2.1
1 x 38w	High frequency	Black	Opal	VSBO38Z	1.6	-	-
1 x 28w	High frequency	Black	Prismatic	VSBP28Z	1.6	EBVSBP28Z	2.1
1 x 38w	High frequency	Black	Prismatic	VSBP38Z	1.6	-	-

**Vienza attachments****Cat No. Weight (kg)**

Round white eyelid	VRWE	0.11
Round black eyelid	VRBE	0.11
Round white mounting skirt	VRWS	0.52
Round black mounting skirt	VRBS	0.52
Photocell kit	VPC	0.10

Photocell kit not suitable for use on emergency versions and when fitted with mounting skirt.  
 Emergency versions available with automatic testing functionality - see page 188 for system features  
 Contact our Technical Support and Application department for further details, telephone 01302 303350